

Single Relay Module




Description

The Single Relay Module enables a controller output signal to drive a single changeover relay. This allows plant of up to 8A at 240 Vac resistive to be switched by the relay contacts. The module may either be mounted on a DIN rail or on a flat surface. There are two versions: the SRMV accepts a 0 to 10 V signal, and the SRMAC accepts a 0 to 24 Vac signal (e.g. triac output).

Features

- SRMV converts a 10 Vdc analogue output signal to a 8 A relay output
- SRMAC converts a 24 Vac (triac) output signal to a 10 A relay output
- Can be mounted on a DIN rail or any flat surface

Physical

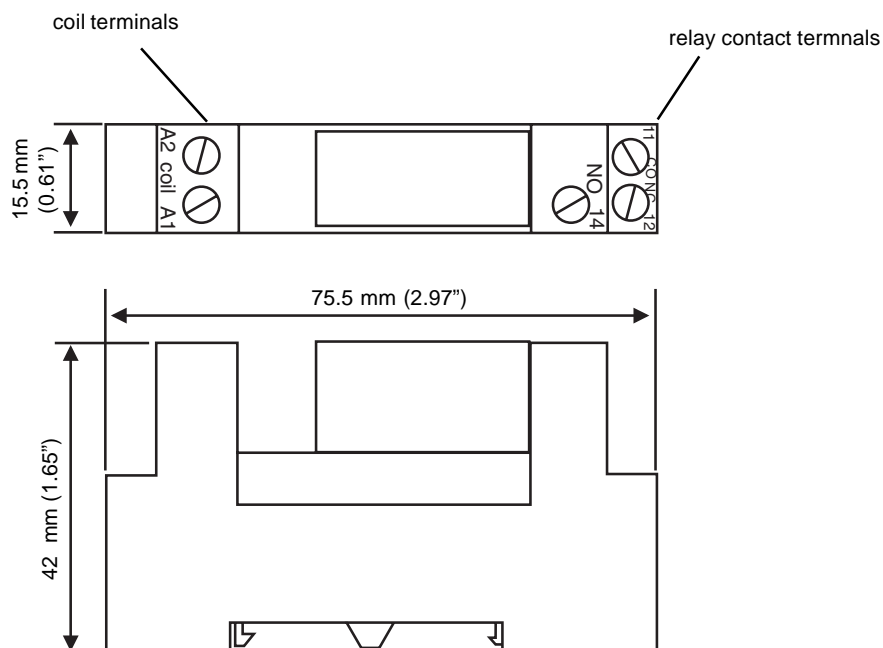

FUNCTIONALITY

Mechanical

The module is supplied with the relay plugged into the screw terminal socket. The socket can be mounted either by clipping onto a standard top hat DIN rail (DIN 46277-3, EN50022, BS5584:1987), or by screwing onto a flat surface.

Electrical

The screw terminals incorporate self lifting cable clamps and can accommodate two 2.5 mm² (11 AWG) wires. The coil is polarity independent. The SRMV coil takes 17.5 mA (approximately) at 10 Vdc which is within all IQ2/3 series analogue output voltage channels' capability; the SRMAC takes 31.6 mA (ac) (approximately) at 24 Vac. The relay is a single pole changeover (SPDT - 1 form C).

INSTALLATION

The SRM should be mounted close to the IQ controller. For SRMV/USA the unit is UL rated as 'UL916 listed open energy management equipment accessory'.

Mount on DIN rail or screw onto flat surface.

if SRMV, connect analogue output channel to relay (polarity independent)

if SRMAC, connect triac output channel to relay (polarity independent)


if SRMV, link analogue output channel for voltage (V)

connect relay output to plant item to be controlled (NO or NC)

test installation

Full installation details are given in SRMV Installation Instructions 91-2853 or SRMAC Installation Instructions TG101985.

CONNECTIONS

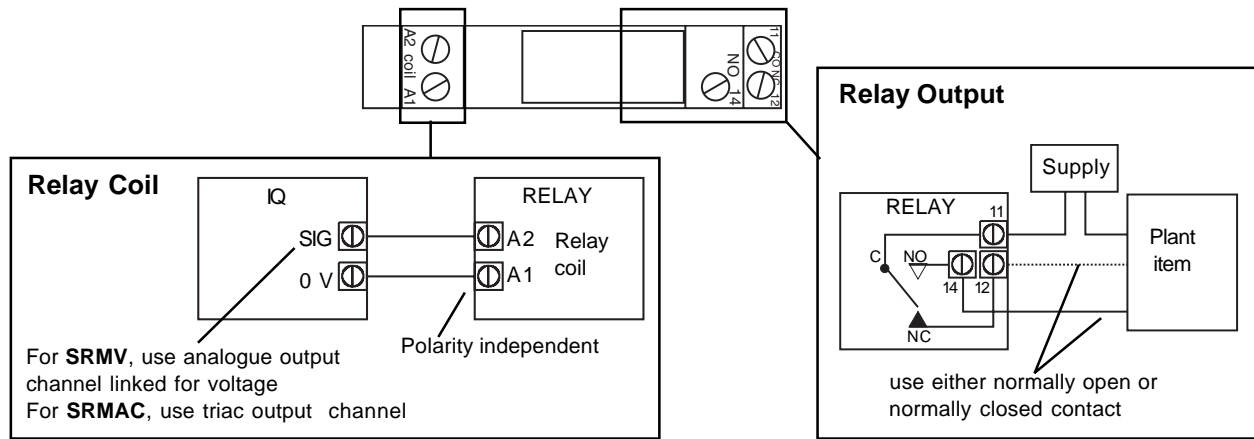


DISPOSAL

COSHH (Control of Substances Hazardous to Health - UK Government 2002) ASSESSMENT FOR DISPOSAL OF SRM. No parts affected.

RECYCLING.

All plastic and metal parts are recyclable. The parts may be sent to a electrical/electronic recovery contractor to recover some of the components for any metals such as gold and silver.



WEEE Directive :

At the end of their useful life the packaging and product should be disposed of by a suitable recycling centre.
Do not dispose of with normal household waste.
Do not burn.

ORDER CODES

Non USA Order Code	USA order code	
SRMV	not available in USA	0 to 10 Vdc voltage driven relay (rated voltage 12 Vdc)
SRMAC	882001570	0 to 24 Vac voltage driven relay (rated voltage 24 Vac)
SRMV/USA/UL	882000480	0 to 10 Vdc voltage driven relay (rated voltage 12 Vdc), UL rated

SPECIFICATIONS

Electrical

Coil Operation	
SRMV	:12 Vdc nominal, at 576 Ω (20 °C) nominal, current 17.5 mA (approx) at 10 Vdc. Minimum operating voltage 9 Vdc.
SRMAC	:24 Vac nominal, at 350 Ω (20 °C) nominal, current 31.6 mA (ac) nominal at 50 Hz. Minimum operating voltage 18 Vac.
Contact Rating	:Arc suppression recommended, see Relay Output Arc Suppression Installation Instructions TG200208.
SRMV	:250 Vac at 8 A (resistive load), 5 A (inductive load, $\cos \phi \geq 0.4$); 20 Vdc at 8 A (resistive load); 24 Vdc at 2 A (inductive load $T \leq 30$ ms). For SRMV/USA the UL rating applies to a load of up to 30V.
SRMAC	:250 Vac at 10 A (resistive load), 6 A (inductive load, $\cos \phi \geq 0.4$); 20 Vdc at 10 A (resistive load); 24 Vdc at 2 A (inductive load $T \leq 30$ ms).

Mechanical

Dimensions	:75.5 mm (2.97") x 15.5 mm (0.61") x 42 mm (1.65")
Weight	:46g (1.6 ozs)
Mounting	:Module consists of relay in socket. Socket can be mounted on a flat surface or onto a DIN rail.
Terminals	:screw with self lifting cable clamp, can accommodate two 2.5 mm ² (11 AWG) wires, or two 1.5 mm ² (16 AWG) wires with bootlace crimp.
Contact Material	:AgNi (90/10)

Environment

Protection	:IP20 (socket)
Ambient Temperature	:-25 °C (-13 °F) to +85 °C (+185 °F)
UL	:(SRMV/USA) The unit is UL rated as 'UL916 listed open energy management equipment accessory'.
CSA	:(SRMV/USA) CSA 22.2 No. 205-M1983 - Signal Equipment (Canada)

Manufactured for and on behalf of the Environmental and Combustion Controls Division of Honeywell Technologies Sàrl, Ecublens, Route du Bois 37, Switzerland by its Authorized Representative.

Trend Control Systems Limited reserves the right to revise this publication from time to time and make changes to the content hereof without obligation to notify any person of such revisions or changes.

Trend Control Systems Limited

P.O. Box 34, Horsham, West Sussex, RH12 2YF, UK. Tel: +44 (0)1403 211888 Fax: +44 (0)1403 241608 www.trend-controls.com

Trend Control Systems USA

6670 185th Avenue NE, Redmond, Washington 98052, USA. Tel: (425)869-3900, Fax: (425)869-8445 www.trend-controls.com